



CW PROFILE HP™

SKU# CWP001

The WW Profile HP™ Ellipsoidal features a High Power 130W Cool White >90CRI 5,600K LED engine producing 11,000+ total lumens, 19°, 26°, 36°, and 50° interchangeable lens options (sold separately), (4) blade manual framing shutters, supports B size metal or HT transparency gobos, manual focus, DMX controlled electronic strobe, 16bit dimming and selectable dimming curve modes, flicker free operation for TV and FILM, adjustable refresh frequency and gamma brightness, 3/5pin DMX and powerCON TRUE1 in/out connections, (4) button LCD control display panel, an integrated rigging yoke, quiet fan cooling, and a multi-voltage universal auto switching power supply (100-240v).



FEATURES

High Power 130W Cool White 5,600K LED Engine

>90CRI and 11,000+ Total Lumens Output

Interchangeable Lens Options 19°, 26°, 36°, 50°**

(4) Blade Manual Framing Shutters

Supports B Size Metal or HT Transparency Gobos***

DMX Controlled Electronic Strobe and 16bit Dimming

Selectable Dimming Curve Modes

Flicker Free Operation for TV and FILM

Adjustable Refresh Frequency and Gamma Brightness

Quiet Fan Cooling

(sold separately)(***gobos and holder not included)**



PRODUCT SPECIFICATIONS

SOURCE

High Power 130W Cool White 5,600K LED Engine
50,000 Hour Average LED Life*

*LED Life may vary depending on several factors including but not limited to:
Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

>90CRI | 11,000+ Total Lumens

EFFECTS

Electronic Strobe and 16bit Dimming
Selectable Dimming Curve Modes

GOBOS

Supports "B" Size Metal, HT Transparency Gobos*
*Gobos and Holder not included.

CONTROL / CONNECTIONS

2 DMX Channel Modes (1 / 4)
Adjustable Refresh Rates
Adjustable Gamma Brightness
4 Button Control Panel / LED Menu Display
3/5pin DMX In/Out / powerCON TRUE1 In/Out

SIZE / WEIGHT

Length: 24.3" (618mm) / 26.5" (674mm) Fully Extended
Width: 12.2" (310mm)
Vertical Height: 15.7" (398mm)
Weight: 22 lbs. (10kg)

ELECTRICAL / THERMAL

Quiet Fan Cooling
AC 100-240V - 50/60Hz
160W Max Power Consumption
14° to 113°F (-10° to 45°C)

APPROVALS / RATINGS



INCLUDED ITEMS

powerCON TRUE1 Cable
3pin DMX Cable
Safety Cable

LENS Options (sold separately)

19°, 26°, 36°, 50°



PHOTOMETRIC DATA (Lens sold separately)

19° LENS ZOOM IN @ FULL ON | 5,708K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
40,778	3,788	6,525	606	3,329	309	1,631	152	725	67	408	38

19° LENS ZOOM OUT @ FULL ON | 5,695K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
36,633	3,403	5,861	544	2,990	278	1,465	136	651	60	366	34

26° LENS ZOOM IN @ FULL ON | 5,648K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
31,326	2,910	5,012	466	2,557	238	1,253	116	557	52	313	29

26° LENS ZOOM OUT @ FULL ON | 5,703K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
28,666	2,663	4,587	426	2,340	217	1,147	107	510	47	287	27

36° LENS ZOOM IN @ FULL ON | 5,713K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
21,951	1,621	3,512	379	1,792	167	878	97	390	46	220	29

36° LENS ZOOM OUT @ FULL ON | 5,720K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
11,909	1,621	1,905	379	972	167	476	97	212	46	119	29


50° LENS ZOOM IN @ FULL ON | 5,675K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
13,104	1,621	2,097	379	1,070	167	524	97	233	46	131	29

50° LENS ZOOM OUT @ FULL ON | 5,686K

2m	6.6 ft	5 m	16.4 ft	7 m	23 ft	10 m	32.8 ft	15 m	49.2 ft	20 m	65.6 ft
lux	fc	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
7,015	1,621	1,122	379	573	167	281	97	125	46	70	29

DIMENSIONAL DIAGRAM

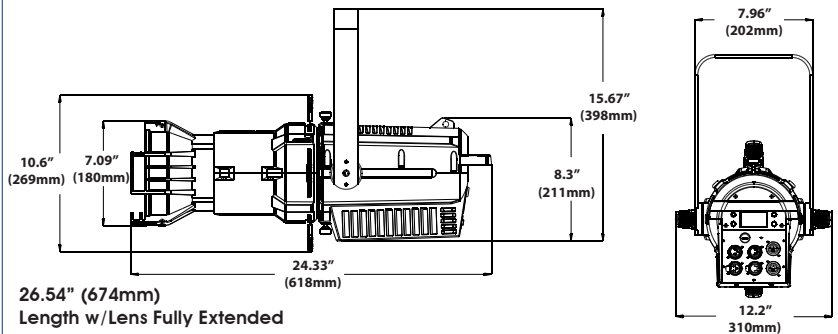

26.54" (674mm)
Length w/Lens Fully Extended

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
QUICK RIG CLAMP	Low Profile Quick Release Clamp
PHD019	Profile High Definition Lens 19°
PHD126	Profile High Definition Lens 26°
PHD236	Profile High Definition Lens 36°
PHD350	Profile High Definition Lens 50°
NEU088	3 ft. (1m) powerCON TRUE1 Power Link Cable
AC3PDMX5PRO	5 ft. (1.5m) 3pin PRO DMX Cable
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable

Specifications are subject to change without notice ©Elation Professional 10/10/17

