

# ATEM 1 M/E Advanced Panel 10



**\$3,079**

The new ATEM 1 M/E Advanced Panel is an elegantly designed professional hardware control panel for all ATEM switchers. It combines modern design with the latest broadcast technology for faster workflows. The new design features a built in LCD and high quality curved buttons that help reduce incorrect key presses. The buttons also have color backlighting to help you quickly recognize important keys. You also get a professional joystick for DVE and camera adjustments, smooth weighted t-bar fader and much more. The buttons feature dynamic displays that allow full customization of the labels as well as custom colors. The shift buttons allow you to double up the number of inputs by selecting a second set of shifted source buttons so you can control up to 20 inputs. The compact size and durable design of the ATEM 1 M/E Advanced Panel fits in a standard equipment rack, making it perfect for shelf mounting in broadcast trucks, mobile racks and fly away kits.


## Connections

### Ethernet

2 x 10/100/1000 BaseT with loop output for additional control panels or computers

### software-updates

1 x USB-C for firmware updates

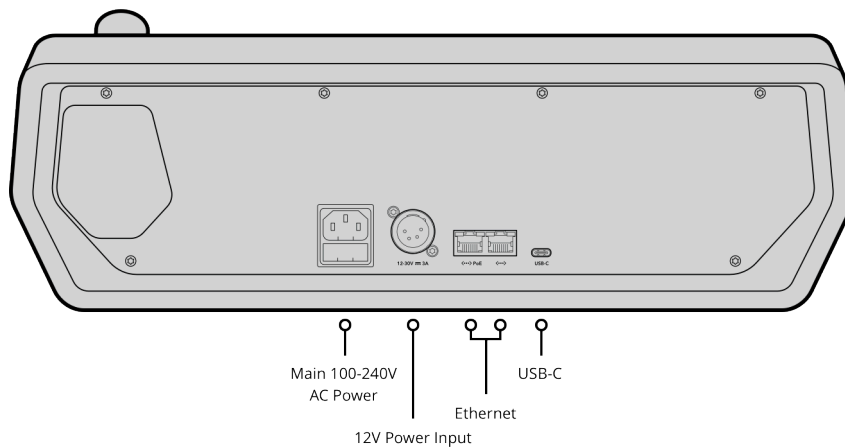

---

## Product Specifics

**Direct Cross Points**

10

**DSK Transition Selectors**

Auto, Cut, Tie/Preview.

**Destination Bus**

1

**Shifted Cross Points**

20

**Preview Transition**

1

**Source Select Bus**

1

**Crosspoint Button Type**

Tri-Color LED

**Transition Rate Displays**

Via main menu

**Fader Bar**

1

**Crosspoint Label**

3 rows 24 character LCD

**LCD Menu Displays**

3

**3 Axis Joystick**

1

**Next Transition Selectors**

BKG, Key 1 - Key 4.

**Menu Control**

20 buttons

**Numeric Keypad**

1

**On-Air indicator**

4

**Dedicated Macro Buttons**

10

**Power Status Indicators**

None

**Multi Control Buttons**

None

---


## Software

**Software Applications**

ATEM Software Control Panel.

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

---

## Power Requirements

**Input Voltage**

1 x Internal 100 - 240V AC.

**Redundant Power**

Yes

**Power Usage**

45W

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 60° C (-4° to 140° F)

### Relative Humidity

Up to 95%

---

## What's Included

ATEM 1 M/E Advanced Panel 10

---

## Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller