


The Biggest Thing in LCD TV Monitors

LCD-1411T
LCD-1411TC
LCD-1411TL
LCD-1411TR
LCD-1411TW

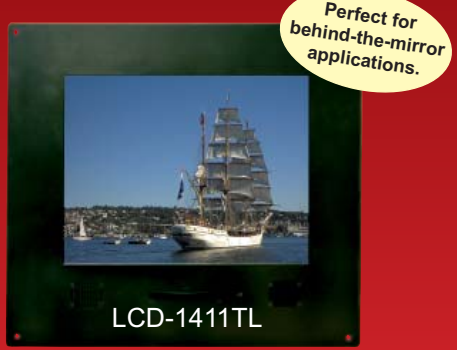

Active Matrix 14.1" Color LCD TV Monitor

- Cable ready ATSC/NTSC/QAM TV tuner
- Wireless remote control
- Dual front speakers for easy listening
- Top controls for power, menu, channel/volume up/down, mode, mute
- On-screen display for : brightness, contrast, tint, H/V position, saturation, sharpness
- Slim space saving design
- For color and B&W applications
- Low power consumption
- Case made of durable black ABS plastic
- Active matrix technology allows wide viewing angle
- Built-in removeable desk stand included
- Response time: 15mS (rising), 10mS (falling)
- VESA conversion plate makes this unit 75mm compliant
- Wireless stereo FM transmitter

LCD-1411TL Unit in Flush Mount Kit (Shown Above)
 Dimensions (WHD): 406 x 368 x 73.6mm / 16" x 14.5" x 2.9"
 Installer's Cut-out (WH): 368 x 330mm / 14.5" x 13"
 Black metal front with plastic back

LCD-1411TC Unit with Custom 4-way Counter Mount and all cables hidden (bulk special order only)

LCD-1411TR Unit in Rack Mount Kit (Shown above)
 Dimensions (WHD): 19" x 12.25" x 2.9"(Occupies 7 RU)

LCD-1411TW Unit with Custom 4-way Wall Mount and all cables hidden (bulk special order only)

Optional Accessories

- HM-400 Under-cabinet hinge mount (shown below)
- WM-30 Wall mount bracket (fixed)
- WM-302 Wall mount with swing arm & 4-way (shown below)



- Display: 14.1" TFT LCD active matrix
- Back Light: Built-in (CCFT)
- Input Signal: ATSC/NTSC/QAM/CATV, NTSC Composite video,
- Resolution: VGA 640 (H) x 480 (V) dots
- Dot Pitch: 0.4425 (H) x 0.4425 (V) mm
- Brightness rating: 450 cd/m² (Nit)
- Colors: 16.7M
- Contrast Ratio: 400 : 1
- Number of Pixels: 307,200 dots
- Viewing angle L/R/T/B: 85/85/85/85 degrees
- Pixel Configuration: RGB Vertical Stripe
- Input Signal Level: 1.0V P-P (positive) 75 Ohm
- Speakers: 4 ohms, 1 W x 2
- LCD-1411T: Dimensions w/o desk stand (WHD): 352 x 307 x 73 mm / 13.9" x 12.1" x 2.9"
- LCD-1411T: Dimensions w/ desk stand (WHD): 352 x 307 x 93 mm / 13.9" x 12.1" x 3.7"
- LCD-1411TC: Dimensions (WHD): 352 x 401 x 73 mm / 13.9" x 15.8" x 7.3"
- LCD-1411TW: Dimensions (WHD): 352 x 307 x 149 mm / 13.9" x 12.1" x 5.9"
- Actual visible screen size (WH): 283 x 212 mm / 11.1" x 8.3"
- Operating temperature: 50~104°F or 10~40°C
- Power Requirement: Regulated 12VDC, 5A, negative ground
- Power Consumption: 60 W (max)
- Includes switching power supply: 100 ~ 240VAC, 1A/47 ~ 63Hz
- Rear Terminal Connections: RCA video IN/OUT jacks, RCA R/L audio IN/OUT jacks, headphone jack x 2, "F" connector for CATV, 2.1mm DC IN jack
- LCD-1411T: Weight: Net: 3.6 kg. / 8 lbs. Gross: 5.7 kg. / 12.6 lbs.
- LCD-1411TC: Weight: Net: 4.5 kg. / 10 lbs. Gross: 7 kg. / 15.4 lbs.
- LCD-1411TL: Weight: Net: 4.7 kg. / 10.4 lbs. Gross: 7.4 kg. / 16.4 lbs.
- LCD-1411TW: Weight: Net: 4.1 kg. / 9 lbs. Gross: 6.8 kg. / 15 lbs.