


UltraLite Microphone ULM-835 (B or F)




UltraLite earset boom microphone with 3.5mm connector

Frequency Response Curve

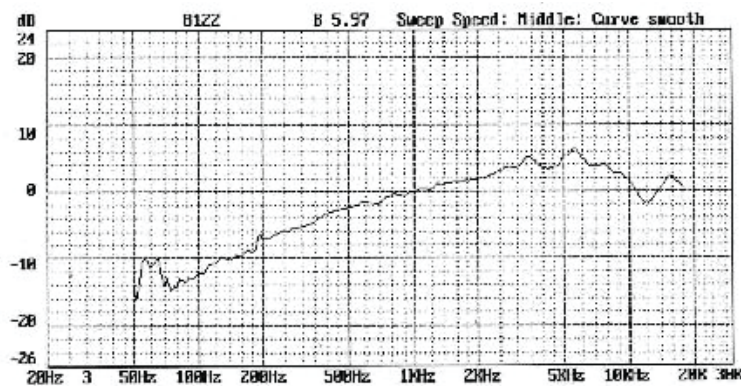

Polar Pattern

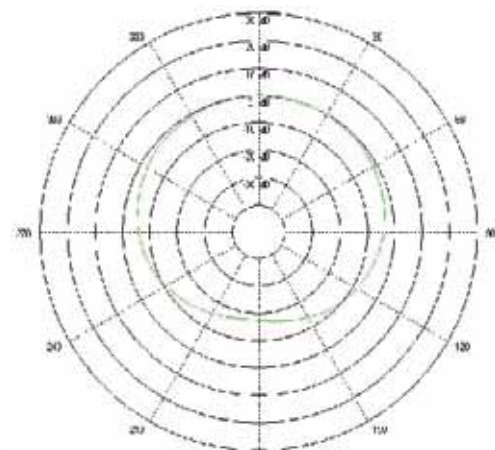

Specifications

Element	Back Electret-Condenser
Directional Characteristics	Uni-directional
Frequency	70 Hz ~ 16,000 Hz
Impedance	1400Ω + 30% (at 1 KHz)
Sensitivity	-67 db±3 db (0 db=1 V/microbar 1000 Hz indicated by open circuit)
Operating Voltage	DC 1V ~ 10V (RL:2K 2Ω)
Connector	3.5 mm Phone, right-angle

Features

- Least Visible
- Very Lightweight
- Optimum Performance