


# Plug-In Microphone LM-300




Plug-in Microphone with 3.5mm connector & lanyard

## Frequency Response Curve

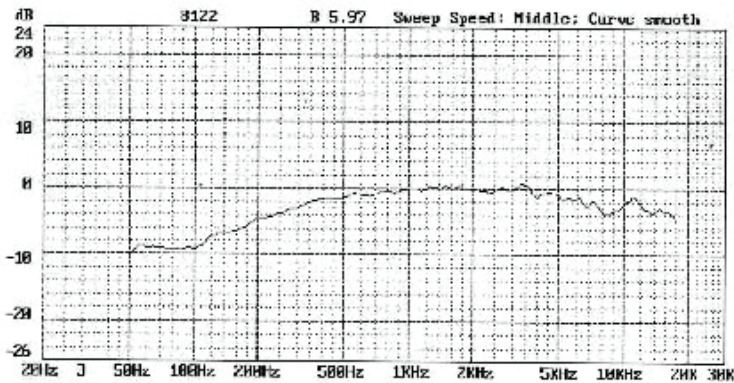

## Polar Pattern

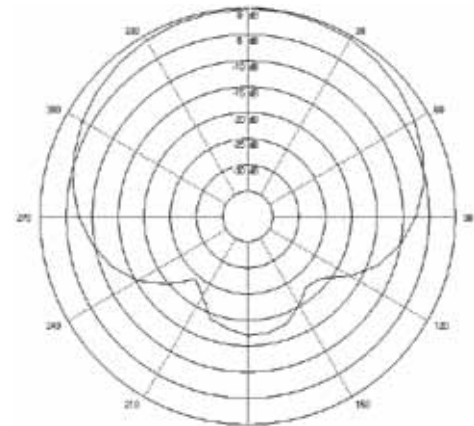

## Specifications

Element	Electret-Condenser
Directional Characteristics	Uni-directional
Frequency	50 Hz ~ 18,000 Hz
Impedance	600 30% ( at 1000 Hz)
Sensitivity	-64 dB / (0 dB=1 V / microbar 1000 Hz indicate by open circuit)
Operating Voltage	DC 1.5V – 10V (RL: 600Ω)
Connector	3.5mm Phone

## Features

- Plugs into Pendant and Body-Pack microphones