
Colar Microphone CM-835






Collar Microphone with 3.5mm connector

Frequency Response Curve

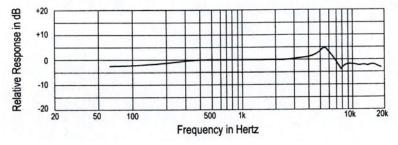



Specifications

Element Back Electret-Condenser
Polar Pattern Cardioid
Directional Characteristics Uni-directional
Frequency Response 70 Hz ~ 16,000 Hz
Sensitivity -65 dB +3 dB

(0 dB = 1V / microbar at

1,000 Hz))

Impedance $600\Omega + 30\%$ (at 1,000 Hz)

Operating Voltage DC 1V – 10V

Connector 3.5mm Phone, right-angle

Features

• Worn around neck with mic oriented upward for excellent voice quality

