

Technical Specifications

TL-SMC

Features at a Glance

- Connects the 3x1 collaboration switchers to the table inserts
- Pre-terminated 3.5mm connections on both ends
- Provides control and powers the inserts
- Stock lengths from 1 - 10 feet
- Custom lengths available




The TechLogix TL-SMC cables are designed to connect the show-me grommets to the show-me switchers. With five available lengths (1, 2, 3, 6 and 10 feet), the TL-SMC will accommodate a range of installation requirements without needing to worry about connectivity issues between devices.

Specifications

| | |
|-------------------------------------|---------------------------------------|
| Input/Output Connections | |
| In | One (1) 3.5 mm TRS |
| Out | One (1) 3.5 mm TRS |
| Chassis and Environmental | |
| Enclosure | Black PVC |
| Cable Length | 1 ft, 2 ft, 3 ft, 6 ft, or 10 ft |
| Shipping Weight | 0.05 kg (0.11 lbs) |
| Operating Temperature (Environment) | 0° to +40° C (+32° to +104° F) |
| Operating Temperature (Chassis) | 31° C (88° F) (S); 38° C (100° F) (R) |
| Operating Humidity (Environment) | 20% to 90%, Non-condensing |
| Storage Temperature (Environment) | -10° to +60° C (+14° to +140° F) |
| Storage Humidity (Environment) | 20% to 90%, Non-condensing |
| Device Compatibility | |
| Show-me Grommet | TL-SMG-DP, TL-SMG-HD, TL-SMG-VGA |
| Show-me Switcher | TL-SM3X1-HD, TL-SM3X1-HDV |

Dimensional Drawing

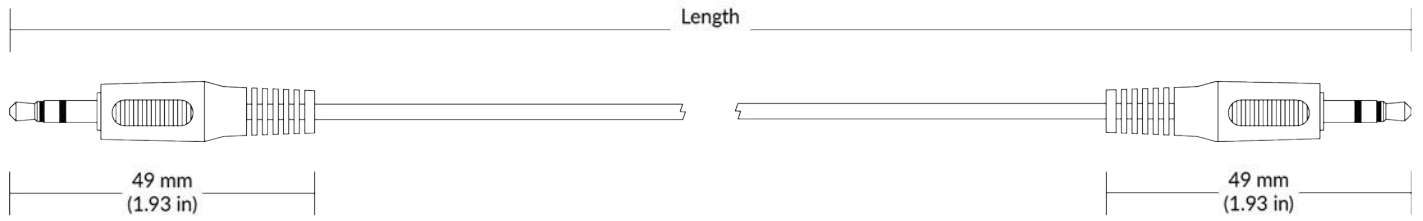

Basic Application Drawing

