


The Biggest Thing in  
Rack Mounted LCD Monitors

# LCD-1900VR LCD-1900VRQ



LCD-1900VR

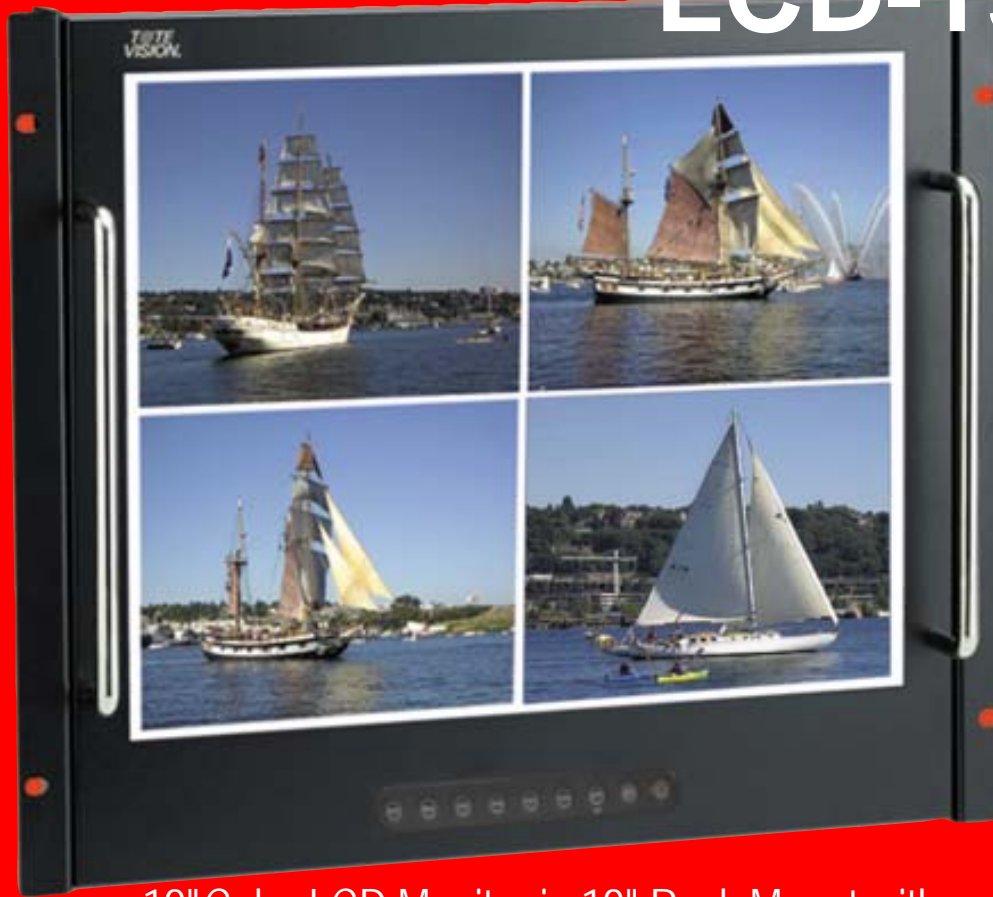

Back View

19" Color LCD Monitor in 19" Rack Mount with and without Built-in Quad

- Tilts 90° in rack for optimum viewing
- Occupies 9 Rack Units
- Hot key allows toggling between video, S-Video, and PC modes
- Double-coated anti-reflective tempered glass provides the ultimate viewing pleasure and impact resistance
- PIP: Picture in picture capability
- On-screen display for: brightness, contrast, back light, hue
- Low power consumption
- Case made of durable metal
- Active matrix technology allows wide viewing angle
- Active matrix technology eliminates distortion

## LCD-1900VRQ Special Features

*Built-in Quad Splitter & Sequential Switcher allows:*

- Individual color control for each of 4 cameras
- Adjustable dwell timing
- Audible alarm when camera signal is lost
- Ability to view any of 4 views in full screen
- Ability to record in quad with full screen on playback

*Front controls for:*

AV/PC, Menu, Ch 1, Ch 2, Ch 3, Ch 4, auto, quad, & power

**For touch screen for LCD-1900VR: order LCD-1900VRTS  
Touch screen not available for LCD-1900VRQ.**

Display: 19.0" TFT LCD active matrix

Back Light: Built-in (CCFT)

Input Signal: Composite NTSC/PAL (auto switching),  
Analog RGB

Resolution: SXGA 1280(H) x 1024(V) dots

PC compatibility: IBM / MAC compatible

Dot Pitch: 0.264(H) x 0.264(V)mm

Brightness rating: 450 cd/m<sup>2</sup> (Nit)

Colors: 16.7M

Contrast Ratio: 500:1

Number of Pixels: 1,310,720 dots

Viewing angle L/R/T/B: 85/85/85/85 degrees

Pixel Configuration: Stripe

Input Signal Level: 1.0V P-P (positive) 75 Ohm

Dimensions (WHD): 19" x 15.75" x 2.5"

Actual visible screen size (WH): 338 x 270 mm / 13.3" x 10.6"

Operating temperature: 50~104°F or 10~40°C

Power Requirement: Regulated 12VDC, A (TBA), negative ground

Power Consumption: 48 W (max), 3 W (power saving off mode)

Includes switching power supply: 100 ~ 240VAC (auto-sensing),  
50 ~ 60Hz, A (TBA)

LCD-1900VR: Rear Terminal Connections: BNC video IN/OUT jacks, S-Video,  
15-pin mini D-sub (female),  
4-pin DC IN jack, RCA video IN  
RCA L/R audio IN, headphone jack,  
9-pin component IN jack

LCD-1900VRQ: Rear Terminal Connections: 4 BNC IN jacks,  
2 BNC OUT jacks (1 for playback,  
1 for recording),  
15-pin mini D-sub (female), 4-pin DC IN

LCD-1900VR Weight: Net: 8.6 kg. / 19 lbs.

Gross: 11.8 kg. / 26 lbs.

LCD-1900VRQ Appox. Weight: Net: TBA kg. / TBA lbs.

Gross: 11.8 kg. / 26 lbs.

**GSA** Schedule

GS-07F-0069L, SIN: 246-42(1), 246-50

Specifications subject to change without notice

©2005 ToteVision

50K

Available through: