


The Biggest Thing in  
Rack Mounted LCD Monitors

# LCD-1700VR LCD-1700VRQ

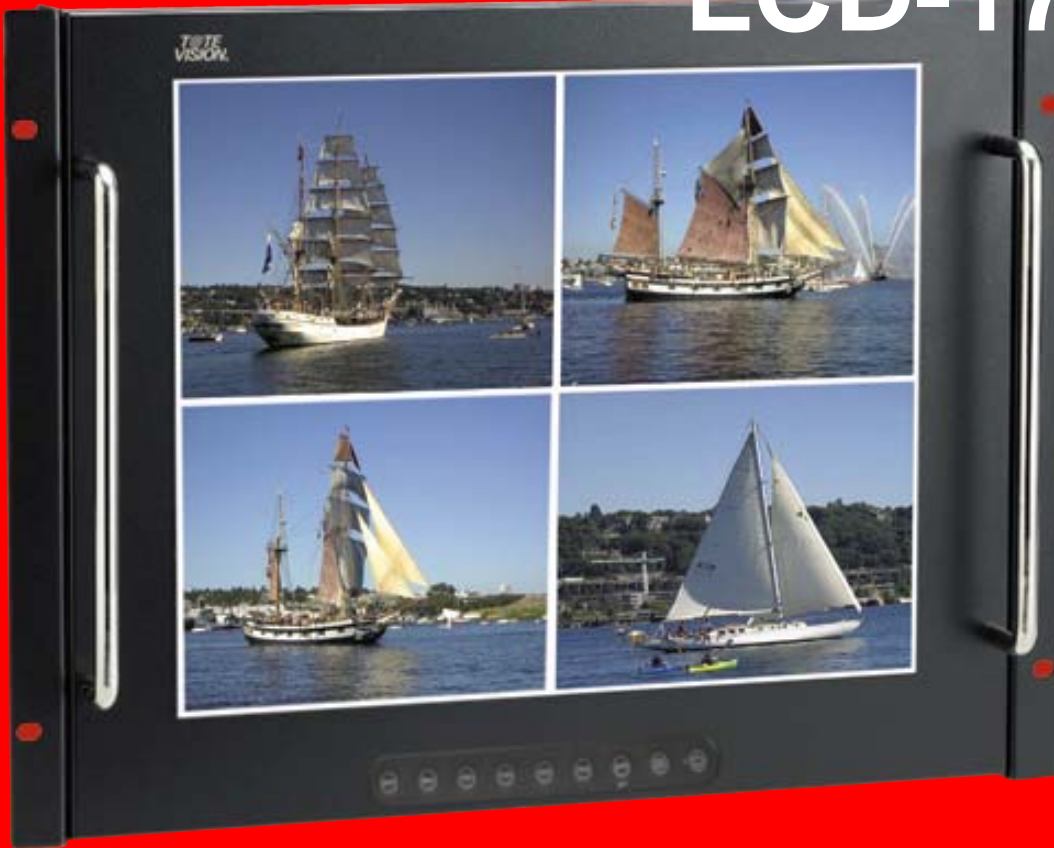

## 17" Color LCD Monitor in 19" Rack Mount with & with out Built-in Quad

- Tilts 90° in rack for optimum viewing
- Occupies 8 Rack Units
- Hot key allows toggeling between video, S-Video, component, and PC modes
- Double-coated anti-reflective tempered glass provides the ultimate viewing pleasure and impact resistance
- PIP: Picture in picture capability
- On-screen display for: brightness, contrast, back light, hue
- Low power consumption
- Case made of durable metal
- Active matrix technology allows wide viewing angle
- Active matrix technology eliminates distortion

### LCD-1700VRQ Special Features

*Built-in Quad Splitter & Sequential Switcher allows:*

- Individual color control for each of 4 cameras
- Adjustable dwell timing
- Audible alarm when camera signal is lost
- Ability to view any of 4 views in full screen
- Ability to record in quad with full screen on playback

*Front controls for:*

AV/PC, Menu, Ch 1, Ch 2, Ch 3, Ch 4, auto, quad, & power

**For touch screen for LCD-1700VR: order LCD-1700VRTS  
Touch screen not available for LCD-1700VRQ.**

- Display: 17.0" TFT LCD active matrix
- Back Light: Built-in (CCFT)
- Input Signal: Composite NTSC/PAL (auto switching), component, S-Video, Analog RGB
- Resolution: SXGA 1280(H) x 1024(V) dots
- PC compatibility: IBM / MAC compatible
- Dot Pitch: 0.264(H) x 0.264(V)mm
- Brightness rating: 350 cd/m<sup>2</sup> (Nit)
- Colors: 16.7M
- Contrast Ratio: 500:1
- Number of Pixels: 1,310,720 dots
- Viewing angle L/R/T/B: 85/85/85/85 degrees
- Pixel Configuration: Stripe
- Input Signal Level: 1.0V P-P (positive) 75 Ohm
- Actual visible screen size (WH): 338 x 270 mm / 13.3" x 10.6"
- Dimensions (WHD): 19" x 14" x 2.5"
- Operating temperature: 50 ~ 104°F or 10 ~ 40°C
- Power Requirement: Regulated 12VDC, 4A, negative ground
- Power Consumption: 48 W (max), 3 W (power saving off mode)
- Includes switching power supply: 100 ~ 240VAC (auto-sensing), 50 ~ 60Hz, 1.2A
- LCD-1700VR: Rear Terminal Connections: BNC video IN/OUT jacks, S-Video, 15-pin mini D-sub (female), 4-pin DC IN jack, RCA video IN, RCA L/R audio IN, headphone jack, 9-pin component IN jack
- LCD-1700VRQ: Rear Terminal Connections: 4 BNC IN jacks, 2 BNC OUT jacks (1 for playback, 1 for recording), 15-pin mini D-sub (female), 4-pin DC IN jack
- LCD-1700VR Weight: Net: 6.7 kg. / 14.7 lbs.  
Gross: 10 kg. / 22 lbs.
- LCD-1700VRQ Weight: Net: 7.5 kg. / 16.54 lbs.  
Gross: 10 kg. / 22 lbs.

**GSA** Schedule

GS-07F-0069L, SIN: 246-42(1), 246-50

Specifications subject to change without notice

©2005 ToteVision

50K

Available through: