


HuddleCamHD Go All-in-One Conferencing Camera

The HuddleCamHD GO is a USB powered, all-in-one conferencing camera with built in microphone and speaker for a complete package over a single USB cable

Model Number:
HC-GO-BK (Black)
HC-GO-WH (White)
<https://huddlecamed.com/go/>

KEY FEATURES

- All-in-One camera/mic/speaker
- USB 2.0 Powered
- 1920 x 1080
- 110° Field of View
- Up to 30 fps

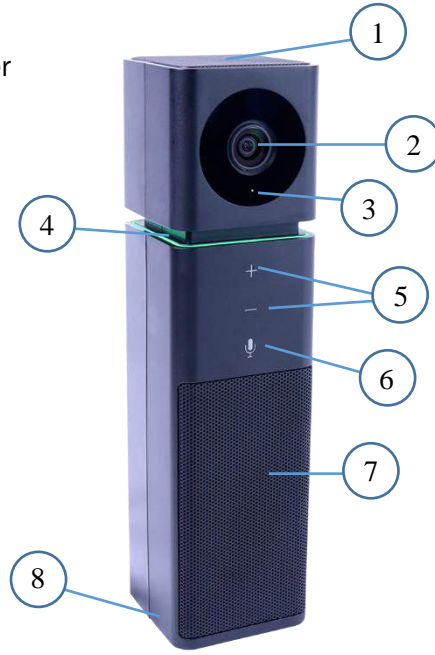

WHAT'S IN THE BOX

- HuddleCamHD GO
- USB 2.0 Data Cable (5ft/1.5m)
- USB 2.0 Extension Cable (6ft/1.8m)
- User Manual























- | | | |
|--|---|---|
| <p>1. Microphone
360° omni-directional microphone</p> <p>2. Lens
1920x1080 lens</p> <p>3. Camera LED
Glow green when camera is in use</p> | <p>4. Microphone LED
Shows status of microphone
Red/green/flash red/flash green</p> <p>5. Speaker control
Change volume of speakerphone</p> <p>6. Microphone Mute
Mute/unmute microphone</p> | <p>7. Speakerphone
Loud speakerphone</p> <p>8. USB 2.0 port
Connect HC-GO to PC</p> |
|--|---|---|




Physical Dimensions	
L x W x H (in.)	2.8 x 2.8 x 9.25
L x W x H (mm.)	60.3 x 60.3 x 234.9

Head parameters	
Lens Field of View	110° FOV
Tilt	~30°
Microphone Range	360° up to 10 feet









Camera Line

	HC-GO-BK		HC-GO-WH	USB-powered, 110° HFOV, all-in-one Camera, Mic, & Speakerphone
	HC3X-BK-G2		HC3X-WH-G2	3X optical zoom, 74° HFOV, USB 2.0 video up to 1080p-30
	HC3XA-BK		HC3XA-WH	3X opt zoom w/ built in mic array, 74° HFOV USB 2.0 video up to 1080p-30
	HC3XW-GY-G2		HC3XW-WH-G2	3X Wide optical zoom, 90° HFOV, USB 3.0 video up to 1080p-30
	HC10X-720-BK		HC10X-720-WH	10X optical zoom, 57° HFOV, USB 2.0 video up to 1080p-30
	HC10XA-BK		HC10XA-WH	10X opt zoom w/ built in mic array, 57° HFOV USB 2.0 video up to 1080p-30
	HC10X-GY-G3		HC10X-WH-G3	10X optical zoom, 61° HFOV, USB 3.0 video up to 1080p-30
	HC20X-GY-G2		HC20X-WH-G2	20X optical zoom, 58° HFOV, USB 3.0 video up to 1080p-30
	HC30X-GY-G2		HC30X-WH-G2	30X optical zoom, 63° HFOV, USB 3.0 video up to 1080p-30
	HC-SIMPLTRACK-TP		HC-SIMPLTRACK-CM	20X optical zoom, 59° HFOV, Auto tracking camera w/ video up to 1080p-60





Control Accessories

	HC-JOY-G2			RS232, RS485, & RS422 3D joystick, VISCA, Pelco-P, Pelco-D
	DB9M-F-xx		VISCA-xx	VISCA RS232 Plenum cable, 4 lengths shown in ft. (xx=25, 50, 75, 100)

Mounting Accessories

	HCM-1-BK		HCM-1-WH	Small Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-2-BK		HCM-2-WH	Large Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-1C-WH		HCM-2C-WH	Small/Large open ceiling mount, mounts to 1" NPT pipe
	PT-CM-1-BK		PT-CM-1-WH	Surface Ceiling Mount, mounts directly to ceiling or box w/ supplied hardware

Conference Audio

	HP-AIR-BK		HP-AIR-WH	Wireless Speakerphone with USB receiver
	HP-AIR-BA-BK			Wireless Speakerphone with USB receiver and external amplifier feed
	HP-AIR2-DUO			Dual Wireless Speakerphones with USB receiver

