




**TR530** 

**Professional** 30X Auto Tracking Camera





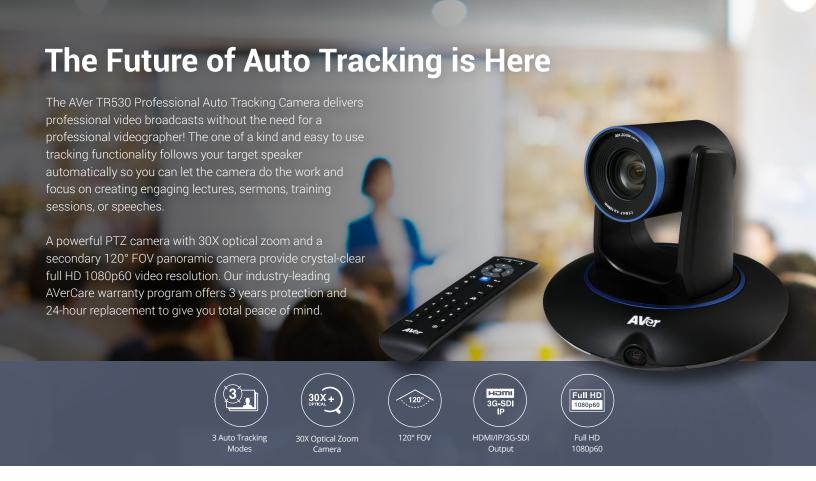

# 3 Auto Tracking Modes provide the ultimate flexibility to capture your target


## **Wide Area Tracking**

- Track your target everywhere
- Presenters are continuously tracked, even off-stage
- Target will be tracked even if he/she is obscured by others



## **Stage Tracking**

- Hands-free video streaming and recording
- Fluidly track your target with Effective Zone settings
- Up to 8 blocking zones to capture professional video



## **Segment Tracking**

- Enhance the capture of content on multiple displays
- Create 4 Content Zones for immediate recognition and tracking
- Perfectly capture the content on display rather than your presenter



**Compatible Software** 









## **Product Specifications**

#### PTZ Cam

PTZ Camera	Image Sensor	1/2.8" 60fps low lux CMOS sensor
	Effective Picture Elements	2 megapixels
	Output Resolution	Auto, 1080p/60, 1080p/50, 1080i/60, 1080i/50, 1080p/30, 720p/60
	Optical Zoom	30X
	Digital Zoom	12X
	Lens Focal Length	f = 4.3mm (Wide) ~ 129mm (Tele)
	Iris	F = 1.6 (Wide) ~ 4.7 (Tele)
	View of Angle	DFOV = 76° (Wide) ~ 5° (Tele)
	Minimum Illumination	IRE50:0.47 lux (60fps) ; 0.23 lux (30fps)
	Preset Number	10 (IR remote), 255 (RS232)
	Minimum Working Distance	1.2m at Tele-End (30X); 0.1m at Wide-End (1X)
	White Balance	Auto / Manual (2500 - 10000)
	Gain	Auto / Manual
	Electronic Shutter	1/5 s to 1/32,000 s
	BLC (Back Light Compensation)	Off / On
	Exposure	Auto / Shutter Priority / IRIS Priority / Manual
	Noise Reduction	Off / Low / Medium / High
	Frequency	Auto/50Hz/60Hz
	S/N Ratio	> 50db
	Horizontal Resolution	Center: 800 TV Lines; Corner: 600 TV Lines
Pan Tilt Parameter	Pan Rotation	-175° (Left) +175° (Right)
	Tilt Rotation	-30° (Down) +90° (Up)
	Pan Control Speed	2° ~ 50°/Sec
	Tilt Control Speed	2° ~ 50°/Sec
	Preset Speed	Pan: 160°/Sec, Tilt: 160°/Sec
Panoramic Camera (Full View)	Image Sensor	1/2.8" 60fps low lux CMOS sensor
	Effective Picture Elements	2 megapixels
	Output Resolution	Auto, 1080p/60, 1080p/30, 720p/60
	Lens Focal Length	2.12mm
	White Balance	Auto
	Exposure	Auto
	FOV	DFOV = 120°, HFOV = 110°, VFOV = 74.5°

Interface /	Video Output	3G-SDI*2, HDMI*1, IP (RJ45)
Streaming / Protocol	Video Output Capability	Up to 1080p/60
	Remote Control	RS232 (via optional DB9 to DIN6 adapter) IP (RJ45)
	Baud Rate	115200 / 9600 / 4800 / 2400 bps
	Network Interface	10 / 100 / 1000Base-T, support Wake-on-LAN
	Network Video Compress Format	H.264
	Network Protocol	RTSP, RTMP, ONVIF
	IP Video Streaming	Dual video streaming (PTZ and panoramic view)
	Control Protocol	VISCA / Pelco-D / Pelco-P
	Power	DC12V, Power adapter
System	Remote IR	IR sensor
	Audio	PCM, AAC-LC, G.711
	LED	Power (Blue-open, Red-close)
	Security	Kensington slot
	Infrared Remote	Receiver on front of camera
	Power Adapter	AC110V-AC220V to DC12V/5A
	Consumption	24 W (Max)
	Operating Temperature	0°C ~ +40°C
	Operation Humidity	20% ~ 80%
	Storage Temperature	-20°C ~ +60°C
	Storage Humidity	20% ~ 95%
	Dimensions	L = 201mm, W = 210mm, H = 176mm
	Weight	1.75kg
	Application	Indoor
	Accessory	Remote control, 12V/5A power adapter, DB9 to DIN6 adapter, user manual
Warranty	Camera	3 Years with AVerCare
	Accessories	1 Year
Ordering Info	Part Number	PAVPTR530
	•	

# **Hardware Specifications**







AVer Information Inc. Americas 668 Mission Court, Fremont, CA 94539 Toll free 1.877.528.7824 T 408.263.3828 F 408.263.8132