



M1

On demand video mixing and scaling

RGBlink[®]

M1



Fully integrated video scaling and mixing for everyday


A complete solution, simply connect M1 to any display and start presenting. Front panel console style controls together touch screen display make M1 intuitive and natural in use, even for the new operator.

More than just a video mixer, M1 allows full scaled output to modern displays without to additional equipment. For stage/conference presentations on board features including PIP (picture-in-picture) add powerful capabilities to make use of additional video sources including cameras;

While compact in size, M1 brings together essential features for small presentation environments, including audio mix features allowing connection to audio mixers or powered speakers.

Features

- Four modular user fit inputs
- Single channel output on HDMI (optionally SDI)
- Resolution independent configurable output
- Dedicated Multi-View Preview
- Picture in Picture with DSK & Mask effects
- Digital video transition effects
- Pixel-to-pixel scaling engine
- Digital stereo audio processing
- Support for external audio insert and output
- Genlock Y In
- Remote control via XPOSE mobile app.

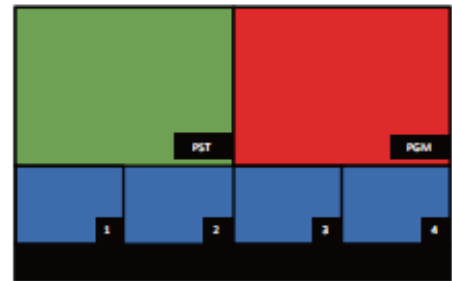

Dedicated Preview

A dedicated HDMI output with multi-view is provided from which both PGM and PST can be monitored, along with input sources and audio levels.




Picture-in-Picture

Add a PIP as a foreground layer in any position, including with scale and crop.

Transition Effects

There are over a dozen transition effects and wipes built into M1. These maybe used via the T-bar or timed from the TAKE button.

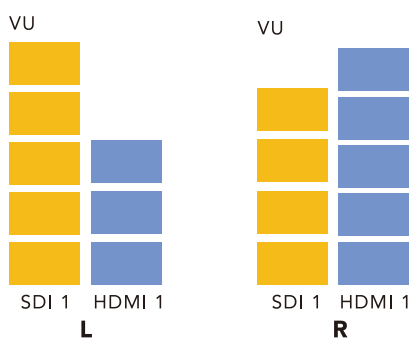

Mixed Audio

Both embedded and insert audio are supported with separate left/right audio level controls available on the front panel. Audio may be selected independently from the video source. PPM monitoring may be shown on the PVW as visual confirmation of source and output.



Digital Effects

The PIP may have an effect applied – options include masks (with a range built in as well as support for custom masks), DSK/Chroma Key to remove a background colour and variable edge blend, as well as a softening effect to allow the PIP to merge with the main image.

Scale

Set output resolution independently from input resolutions, and scale the output pixel-to-pixel, ideal for direct connection to non-native displays such as LED.



Visual Enhancements

Apply a range of visual effects and enhancements with fine grain controls. Controls include brightness, contrast, saturation, sharpness and color temperature.

Video Mixing

M1 vision mixer style control panel provides a range of tactile controls including familiar T-Bar and large illuminated buttons for easy of operation.

Modular by Design

Each input is individual and are user fit – choose from a wide range of modular signal options. Modules are highly standardised across the RGBlink range for event greater flexibility.

Input options include HDMI, DVI, SDI, CVBS, USB and more.

Output options are HDMI or HDMI|SDI.



**shown with optional input and output modules – refer specification and options*


Specifications

Connectors	Input	1 slots up to 4 inputs <i>Select from</i>		DVI Module	1 x DVI-I (supports DVI,VGA,YPbPr,CVBS)
		HDMI Module	1 x HDMI-A		
		DP Module	1 x DisplayPort		
		HDBaseT Module	1 x RJ45		
		SDI Module	2 x BNC (1 In 1 Loop)		
		USB Module	2 x USB (1 In 1 Backup)		
	Output	<i>Select from</i>	With SDI	1 x HDMI-A 1 x BNC	
			Without SDI	1 x HDMI-A	
	Preview		HDMI	1 x HDMI-A	
	Audio		Input	2 x RCA	
		Output	2 x RCA 1 x stereo mini Jack		
Communication		LAN	1 x RJ45		
		Tally	1 x DB9		
		USB	1 x USB-A		
		Genlock Y	1 x BNC		
Power		1 x IEC			
Performance	Input Resolution	SDI	SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/59/59.94/60		
		DVI DP HDMI HDBaseT			
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60		
		VESA	800x600@60 1024x768@60 1280x720@60 1280x800@60 1280x960@60 1280x1024@60 1400x1050@60 1600x1200@60 1920x1080@60		
	VGA	VESA	800x600@60 1024x768@60 1280x720@60 1280x800@60 1280x960@60 1280x1024@60 1400x1050@60 1440x900@60 1600x1200@60		
		CVBS	SMPTE 480i 576i		
	Output Resolution	Select from below or customized			
		SDI	SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60		
		HDMI	SMPTE 720p @50/59.94/60 1080p@50/59.94/60		
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1600x1200@60 1920x1080@60		
Supported Standards	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI			
	HDMI	1.3			
	DVI	S-DVI			
	DisplayPort	1.1			
Processing Engine	VGA	UXGA			
	USB	2.0			
	10bit				
Features	Layers	2			
	MASK Edit	Support			
	Brightness	Standard range			
	EDID Management	Yes			
Power	Input Voltage	AC 85V-264V, 50/60Hz			
	Max Power	120W			
Environment	Temperature	0- 55°C			
	Humidity	10%-90%			
Physical	Weight	Net weight	5.5Kg		
		Package	8kg		
	Dimensions	Net weight	462mm×280mm×95mm		
		Package	585mm×410mm×205mm		

Order Codes

Product Code	Item
220-0001-01-0	M1 (with HDMI/SDI Output)
220-0001-02-0	M1 (with HDMI/SDI Output with 4 x HDMI Input)
220-0001-03-0	M1 (with HDMI/SDI Output with 4 x DVI Input)
220-0001-12-0	M1 (with HDMI/SDI Output with 4 x HDMI Input)
290-0001-01-0	Output Module PGM HDMI/SDI PVW HDMI
290-0001-02-0	Output Module PGM HDMI PVW HDMI
930-0002-01-0	Wings/Sides for M1 (Pair)
190-0001-03-2	Single DisplayPort Input Module
190-0001-04-2	Single DVI Input Module
190-0001-07-2	Single 3G-SDI Input Module
190-0001-10-2	Single USB2.0 Media Input Module
190-0001-13-2	Single HDMI Input Module
190-0001-15-2	Single HDBaseT Input Module

Dimensions

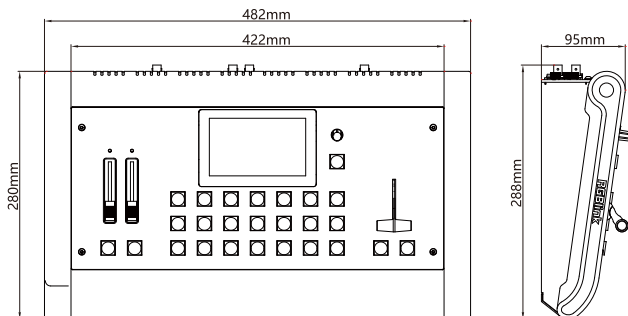

WEB: www.rgblink.com EMAIL: sales@rgblink.com PHONE: +86 592 5771197

Proudly designed and manufactured in **Xiamen Hi Technology Zone, China**

RGBlink[®]



www.rgblink.com