




QUAD SPLITTERS

B/W & COLOR QUAD SPLITTERS/SEQUENTIAL SWITCHERS

QD-04E

Black & White Quad Splitter

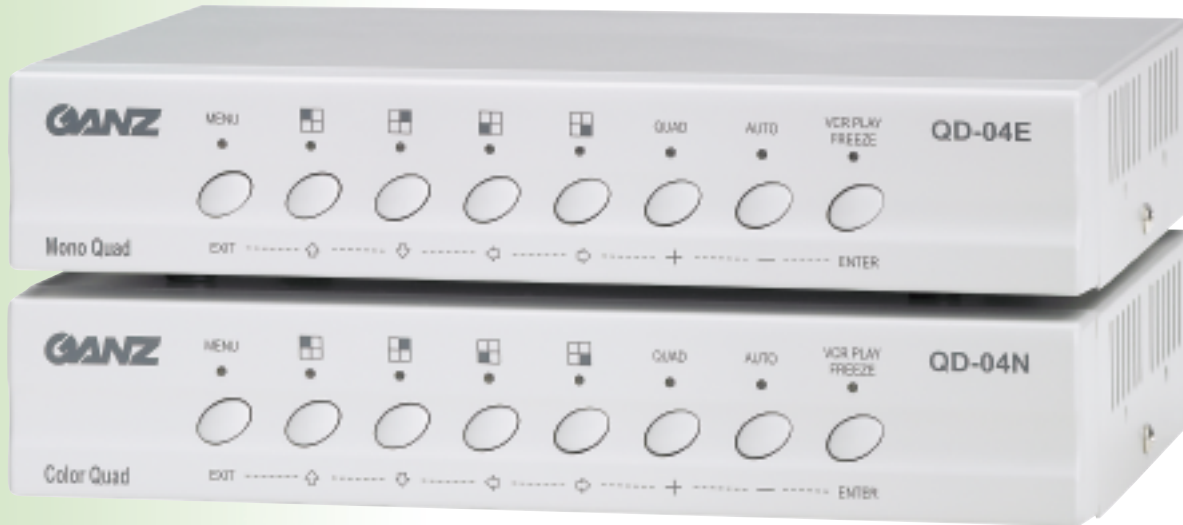

QD-04N

Color Quad Splitter

FEATURES

The GANZ QD-04 Series Quads offer a high quality, low cost, color or monochrome video processor capable of displaying and recording four cameras on the monitor simultaneously. The units also operate as a sequential switcher, displaying each camera as a full screen image or as part of a sequence. The QD-04 Series is simple to program with on-screen menus, allowing access to alarm programming, camera titling, time and date set and many other useful features.

- 4 Channel monochrome QD-04E
- 4 Channel color QD-04N
- Independent full screen or quad screen format
- Real time display (30 frames per second)
- Alarm event log
- 4 Alarm inputs
- Electronic playback zoom
- 10 character titling per camera
- RS232 interface



QUADS



CBC (AMERICA) Corp.


NEW YORK: 55 MALL DRIVE • COMMACK, NY 11725
TEL: 1 (800) 422-6707 • (631) 864-9700 • FAX: (631) 543-5426
CALIFORNIA: 20521 EARL STREET • TORRANCE, CA 90503
TEL: 1 (800) 888-0131 • (310) 793-1500 • FAX: (310) 793-1506
www.cbcamerica.com

AVAILABLE MODELS

QD-04E BLACK & WHITE QUAD SPLITTER

QD-04N COLOR QUAD SPLITTER

4 CHANNEL QUAD SYSTEM

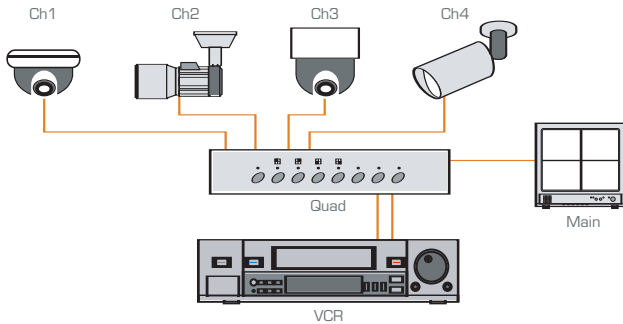

QUAD SPLITTERS

Black & White and Color Splitters



QD-04E Rear Panel



QD-04N Rear Panel

SPECIFICATIONS

MODEL	QD-04E	QD-04N
CAMERA TYPE	Monochrome	Color
VIDEO SYSTEM	EIA	NTSC
RESOLUTION (H x V)	720 (H) x 480 (V) pixels	
VIDEO INPUT PORT	4 + 1 (VCR) cameras – 4 x 1.0Vp-p 75 ohms BNC	
VIDEO OUTPUT PORT	1 switch & 1 quad output	
MONITOR OUTPUT	1 output – 1 x 1.0Vp-p 75 ohms BNC	
VCR OUTPUT	1 output – 1 x 1.0Vp-p 75 ohms BNC	
VCR PLAYBACK	VCR playback zoom	
REFRESH RATE	Real Time: 30 Frame/Second	
ALARM INPUT	4 inputs – 4 x N/O or N/C	
ALARM OUTPUT	1 output – 1 x N/O	
ALARM DURATION	1-99 sec. adjustable	
TITLING	10 characters per camera	
OPERATING CONDITIONS	0-50 C°; 80% relative humidity	
POWER SOURCE	Adapter DC12V, 1AMP (provided)	
DIMENSIONS (W x H x D)	240mm (9.45") W x 45mm (1.8") H x 150mm (5.9") D	
WEIGHT	1.3kg / 2.9 lbs.	
RS232 interface	Yes	

