


floor rack with removable sides, rear access cover, tempered glass door  
18U x 24"D x 22"W



### features.

- **Panel Space:** 18U or 31.50" [800]
- **Overall Height:** 35.67" [906]
- **Overall Depth:** 24.00" [610]
- **Usable Depth:** 22.00" [559]
- **Overall Width:** 22.31" [567]
- **Description:** Elegant floor rack for 19" equipment is designed for an executive boardroom, home theater or office. Includes tempered glass front door and rear access cover.
- **Construction:** Welded steel frame with removable side panels, rear access cover, and tempered glass door. 16-gauge certified U.S. steel with top and base reinforced at loadbearing junctions. Charcoal Grey textured finish. Beveled edge corners.
- **Front:** Includes smoked grey tempered glass door with inset handle and key lock. Mounts left or right.
- **Rear:** Removable rear access cover with key lock opens from the top. Rear cover is keyed the same as side panels.
- **Sides:** Removable side panels with key locks are keyed the same as rear door.
- **Base:** Large 12" x 12" opening in center of base, plus two holes with grommets for cable access. Includes 10-32 threaded grounding stud and four leg levelers.
- **Top:** Steel top features two vents and a center hole with grommet for cable access.
- **Cable Management:** Hole with grommet in top, two in base.
- **Rack Rails—18U (fully adjustable):** Two pairs of 11-gauge steel, 10-32 threaded rails with rack unit increments printed on E.I.A. spacing.
- **Hardware:** Black pilot point screws with captive washers for quick installation.
- **Compliance:** EIA/TIA compliant. RoHS compliant.
- **Load Capacity:** 500 lbs. [226 kg]

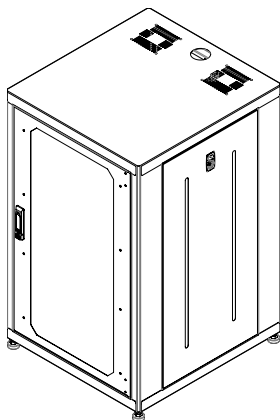

### a&e specifications.

The EIA/TIA compliant 19" equipment rack shall be Lowell #LDR-1824 with overall dimensions of 22.31"W x 24.00"D x 35.67"H, providing 18U panel space. Construction shall be welded 16-gauge steel frame with top and base reinforced at loadbearing junctions. It shall have a Charcoal Grey textured finish. The rack shall include a smoked grey tempered glass front door with key lock, recessed rear access cover with key lock, removable side panels with key locks, two pairs of 11-gauge steel adjustable rails with mounting holes tapped 10-32 and rack unit increments printed on EIA spacing. The steel top shall have two vents and a hole with grommet for cable management. The base shall feature a center opening, two holes with grommets, and a grounding stud. The rack shall include four leg levelers.

### LDR series summary

Model No.	Rack Units	Overall Depth	Usable Depth	Overall Height	Usable Height	Overall Width	Bottom Opening Depth	Bottom Opening Width	Adjustable Rails	Load Capacity lbs.
▶ LDR-1824	18 U	24.00 [610]	22.00 [559]	35.67 [906]	31.50 [800]	22.31 [567]	12.00 [305]	12.00 [305]	2 pr	500
LDR-2724	27 U	24.00 [610]	22.00 [559]	51.42 [1306]	47.25 [1200]	22.31 [567]	12.00 [305]	12.00 [305]	2 pr	750
LDR-3524	35 U	24.00 [610]	22.00 [559]	65.43 [1662]	61.25 [1556]	22.31 [567]	12.00 [305]	12.00 [305]	2 pr	980
LDR-4224	42 U	24.00 [610]	22.00 [559]	77.68 [1973]	73.50 [1867]	22.31 [567]	12.00 [305]	12.00 [305]	2 pr	1200

Rack dimensions (rounded) – inches and [mm]  
1U = 1.75"



