KEY FEATURES
Dual A/B XLR DMX Input
10 isolated XLR DMX Outputs
A/B routing per output port
LED feedback for In/Out/A/B/Power
Industrial strength powder-coated finish
Lightweight and rugged rackmount housing

SPECIFICATIONS

MOUNTING
Rackmount

CONNECTIONS

Front: DMX10-5
(2) 5pin DMX Input (A & B)
(10) 5pin Opto-Isolated DMX Outputs
(Toggle between A & B)

Back
Locking Power In

Front: DMX10-3
- (2) 3pin DMX Input (A & B)
- (10) 3pin Opto-Isolated DMX Outputs
  (Toggle between A & B)

PHYSICAL
Length: 19.0" (482.5mm)
Width: 6.1" (155.9mm)
Height: 1.7" (44mm)
Weight: 1.82 kg (4.0 lbs)

ELECTRICAL
100-240 V nominal, 47/63Hz, 0.14A
1A Fuse

INCLUDED ITEMS
1.5m power cable (EU or US version)
APPROVALS/RATINGS
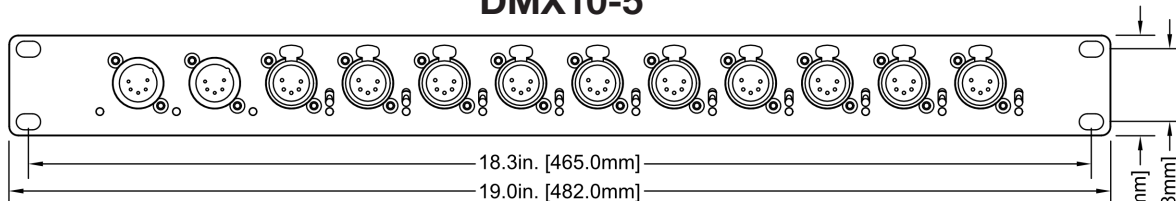cETLus / CE / IP20

DMX10

ORDERING

MODEL
DMX10-5

DMX10-3

INCLUDED ITEMS
1.5m Locking power cable (EU or US version)

DMX10

DMX10-5

18.3in. [465.0mm]
19.0in. [482.0mm]

1.7in. [44.0mm]
1.3in. [31.8mm]

DMX10-3

1.3in. [31.8mm]
1.7in. [44.0mm]

18.3in. [465.0mm]
19.0in. [482.0mm]

0.1in. [3.0mm]

5.8in. [146.4mm]
6.0in. [151.4mm]
6.1in. [155.9mm]

0.3in. [7.0mm]

17.4in. [442.0mm]

0.4in. [10.6mm]