


OCEAN WAY AUDIO

HR4/HR4S REFERENCE MONITOR

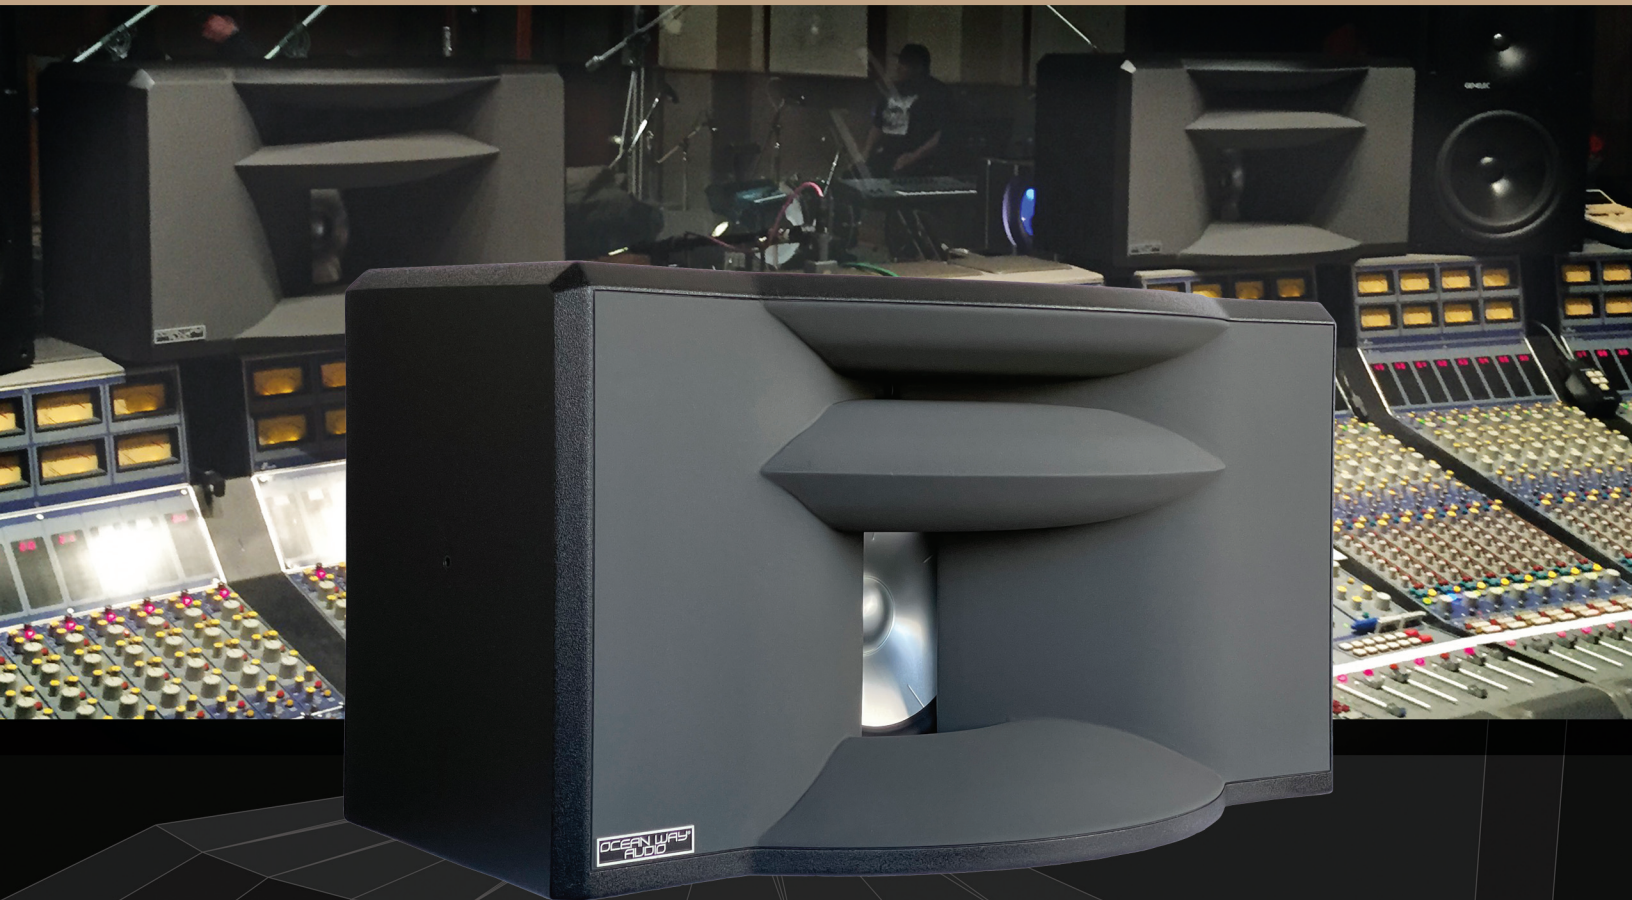


The Ocean Way Audio **HR4 Reference Monitor** is a 24", integrated 2-way dual-horn system that can be placed in any environment to provide an exceptionally accurate monitoring experience.

At the heart of the acoustic design is HR4's dual/hybrid waveguide system delivering a 100x40 degree window. Its unique design is realized with the aid of high-grade, 3D solid modelling. This accurate process allows for creating geometrically-complex surfaces that create accurately-matched and detailed imaging within the system. As a result, the HR4 delivers a stunning 100 degree dispersion pattern over a very wide audio range. An unusually-wide horizontal sweet-spot is revealed with rich detail across a broad area of the listening environment. The consistency of its stereo image, even at the far corners of the room, is delivered due to the highly consistent directivity response of the speaker system.

- **Proprietary 2-way compression-driven hybrid horn/waveguide system**
- **Ultra-wide horizontal sweet-spot with rich detail across a broad area of the listening zone**
- **Unmatched ultra-wide 100 H / 40 V Degree Dispersion, 35Hz to 22kHz**
- **High resolution 1" HF driver with excellent mechanical linearity**
- **Geometrically reinforced 8" aluminum cone LF driver within ported cabinet**
- **Dual/hybrid waveguide with superior detailed imaging**
- **250 watts/side, digital & analog inputs, accepting 24bit / 192kHz data streams**
- **HR4S: 3-way option available with a pair of 700 watt/side 12" ported subwoofers**

Ocean Way Audio HR4/HR4S Reference Monitor

SPECIFICATIONS & DESIGN DETAILS

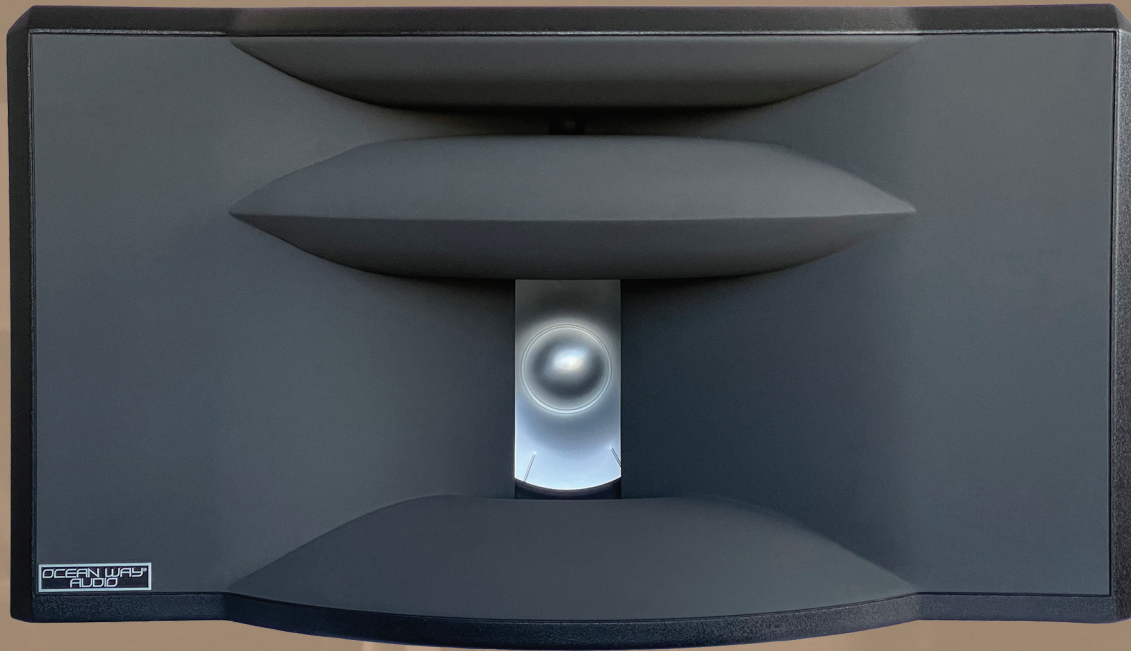

The HR4's HF driver is a high definition design with excellent mechanical linearity. The LF driver is geometrically reinforced aluminum cone with a vented cast aluminum chassis yielding optimum strength and low compression. Combined with the ported cabinet, the system is tuned to perfection with a seamless transition between the drivers. Our two-way, self-powered design delivers an unprecedented level of performance allowing for flexibility of placement in the room with a matched uniform frequency response of 35 Hz to 22 kHz, and an extraordinary 116 dB maximum SPL between channels.

In spite of the HR4's minimal footprint, its exceptional low frequency response eliminates the need for a subwoofer. However... for those who wish to play their music exceptionally loud, we offer a 3-Way model comprised of two additional cabinets, each with 12" LF drivers. In spite of the HR4's minimal footprint, its exceptional low frequency response eliminates the need for a subwoofer. However... for those who wish to play their music exceptionally loud, we offer a 3-Way model comprised of two additional cabinets, each with 12" LF drivers.

Specifications

Powered:	Yes. Accepts analog/digital inputs 24 bit/192 kHz	Frequency Range 2-Way:	35Hz-25kHz
Driver Configuration:	2-way, compression-driven horns/waveguides	Frequency Range 3-Way:	25Hz-25kHz
3-Way Version Available:	Yes (HR4S)	Maximum Peak SPL 2-Way:	116dB
HF Driver Size/Amp:	1"/125W	Maximum Peak SPL 3-Way:	118dB
LF Driver Size/Amp:	8"/125W	Dimensions:	14"H x 25.5" W x 14"D
3-Way Version:	12"/800W	Weight:	57 lbs.
AES-3 Digital Inputs:	Yes	S12A Mk II 3-Way Optional Sub:	18"H x 18" W x 21.5"D
Horz/Vert Directvty Ctrl:	100 / 40 degrees	S12A Mk II Weight:	78 lbs.
Enclosure Type:	Ported		