





LM-300



Plug-in Microphone

Frequency Response Curve

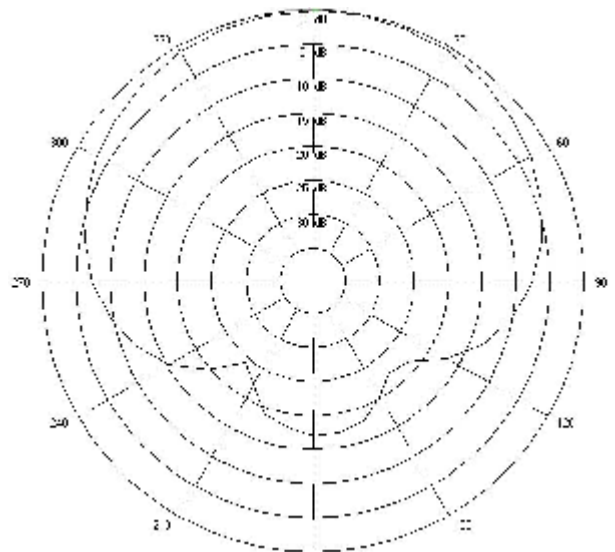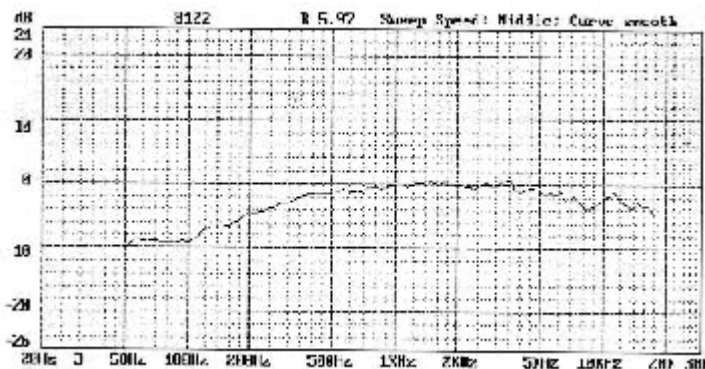

Specifications:

Element:	Electret-Condenser
Directional Characteristics:	Uni-directional
Frequency Response:	50 Hz ~ 18,000 Hz
Impedance:	600 30% (at 1000 Hz)
Sensitivity:	-64 dB / (0 dB=1 V / microbar 1000 Hz indicate by open circuit)
Operating Voltage:	DC 1.5V – 10V (RL: 600Ω)
Connector:	3.5mm Phone