



THERMA TOUR 600

SPECIFICATIONS / TECHNICAL DATA REV A

KEY FEATURES

- 370 Watt Low Power Consumption
- Over 35 Hours Of Run Time
- Haze Lasting Up To 3 Hours After Machine Is Off
- Rugged Mobile Road Case Design
- Soundproof Insulation For Indoor Use



SPECIFICATIONS

Dynamic Effects

- . Output: 1200 cu.ft/min
- . External Visual Fluid Level Detection

Control

- . 2 Card Inputs
- . RDM (Remote Device Management)
- . Control Protocol: DMX
- . DMX Channels: 1, 3
- . DMX Modes: 2
- . On-Board Timing Control
- . 5 Factory Presets
- . 4-pin Wired Remote Input
- . Touch Screen Display
- . Manual Hazing

Connections

- . Data Connectors: 5-pin XLR In/Out, 4-pin XLR Out
- . Locking Power Connector

Construction / Physical / Performance

- . Dimensions (LxWxH): 20.2 x 14.7 x 14.1 in / 514.1 x 374.1 x 365.1 mm
- . Weight: 66lbs. / 30kg
- . Fluid Tank Capacity: 2.5L
- . Fluid Consumption: 1.0ml/min

Electrical

- . Power Consumption: 370w
- . Input Voltage: 120VAC, 50Hz (US Version), 230VAC/240VAC, 60Hz (EU Version)
- . Breaker Size: 10A (US version)
- . Breaker Size: 5A (EU version)

Certifications / Qualifications / Thermal

- . IP Rating: IP20, dry location
- . Maximum Temperature (Ambient): 104° F (40° C)
- . Exterior Surface Temperature: 122° F (50° C)



THERMA TOUR 600




SPECIFICATIONS / TECHNICAL DATA REV A

What's Included

- . Flight Case
- . 14 AWG Locking Power Cable

Optional Accessories

- . MAGFLY Card
- . MAG-RF Card
- . Atmosity ARH-2L (oil base haze fluid)

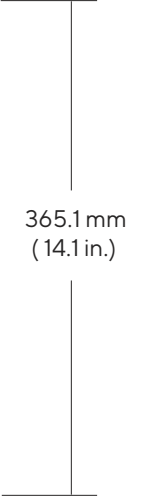

MAGMATIC