



PRISMA MINI PAR 45

SPECIFICATIONS / TECHNICAL DATA REV A

KEY FEATURES

- IP65 Rated Exterior High-Power UV Wash Par Luminaire
- 45 Degree Wide Beam Angle
- 365nm True UV Peak Wavelength
- Zero Visible Light Output
- IP Rated Power/Data Pigtail Cable Attached



SPECIFICATIONS

Dynamic Effects

- . 45° Beam Angle
- . Variable Dimming Curve Modes
- . High Speed Electronic Strobe
- . Beam Uniformity
- . (7) 3W High Power UV Diode Led's
- . 20,000 Hour Average Led Life

Control (Via Prisma Driver 8 or Prisma Driver 8IP)

- . Multiple DMX Channel Modes
- . DMX-512 and RDM Protocol Support

Connections

- . 9 ft (2.74m) 2-Conductor 14 Gauge IP Rated Power/Data Pigtail Cable Attached

Construction / Physical / Performance

- . Dimensions (LxWxH): 5.66 x 2.86 x 5.64 in. / 144 x 72.8 x 143.3mm
- . Weight: 1.98 lbs. / 0.9 kg

Electrical

- . Input Voltage: DC 0-25V
- . Power Consumption: 18.7W
- . Current: 700mA (Max)

Certifications / Qualifications / Thermal

- . IP Rating: IP65 Rating
- . Approvals: ROHS, CE Approved
- . Cooling: Air Cooled
- . Maximum Temperature (Ambient): 113° F (45° C)
- . Minimum Temperature (Ambient): 14° F (-10° C)

MAGMATIC



PRISMA MINI PAR 45

SPECIFICATIONS / TECHNICAL DATA REV A

What's Included

- . Phoenix Connector (x1)
- . Positive Wire Tip Sheath (x2)
- . Negative Wire Tip Sheath (x2)

Optional Accessories


- . Prisma Mini Par 45 Black Glass (PSG845)



144 mm
(5.66 in.)



72.8 mm
(2.86 in.)

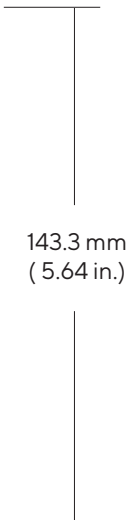

143.3 mm
(5.64 in.)

MAGMATIC