

# COLLABORATE® Versa Hub



The COLLABORATE® Versa Hub provides single-USB connections in various workspaces for simple, ergonomic connection of peripheral devices to room PC or laptops.



### Provides single-USB connectivity

Connect laptop or room PC to audio and video peripherals with a single-cable connection.


- > Connect laptop or room PC to audio and video peripherals with a single-cable connection.
- > Use with Versa Lite CT, and Versa Room CT solutions to easily connect the BMA CTH, cameras, and display options to your room PC or laptop with a single USB cable.
- > Use with COLLABORATE Versa and Versa Pro solutions to combine mic and camera options and allow easy BYOD with a single USB connection to your room PC or laptop.
- > USB 3.0 or USB 2.0 compatibility, with 4 USB 2.0 ports (with one port for smartphone charging function) and 2 USB 3.0 ports.
- > Easily expandable to support up to 6 displays.
- > Supports resolution up to 2048 x 1152.
- > Primary / Extend / Mirror Video Modes.
- > Supports DVI-I / HDMI / VGA, with built-in USB 3.0 Gigabit Ethernet adapter and Audio Mic in and Line Out.

### APPLICATIONS

- Cloud-based video collaboration
- Cloud-based audio conferencing
- In-Room presentation

### WORKSPACES

- PC workspaces
- Laptop workspaces
- Executive offices
- Small-to mid-sized meeting rooms
- Boardrooms

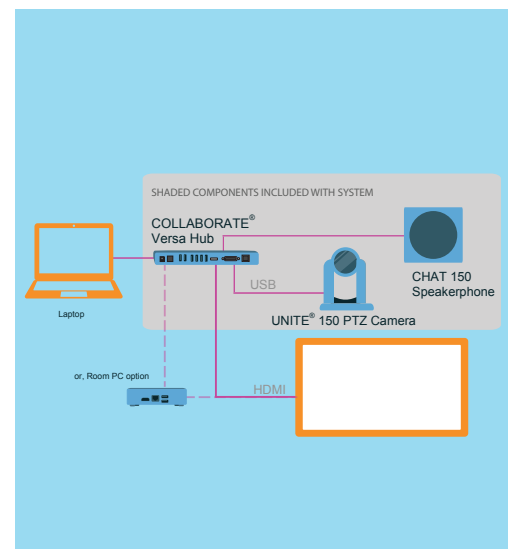

### Flexibility for BYOD room systems

USB 3.0 or USB 2.0 compatibility, with 4 USB 2.0 ports (with one port for smartphone charging function) and 2 USB 3.0 ports.

*Great Ideas Need to be Seen and Heard™*

# COLLABORATE<sup>®</sup> Versa Hub

**SYSTEM REQUIREMENTS**

- 2.0 GHz Core2 Duo or better, 1GB RAM
- Full-Screen Video Playback: Core i3 i5 or i7 2+GHz, 4GB RAM
- Operating System: Windows Vista/7/8/8.1/10, Mac OS 10.2 or above
- Max Resolution: 2048 x 1152

**HARDWARE**

- Ports:
  - 1x USB 3.0 (Type-B) for laptop (Requires Display Link driver on laptop)
  - 2x USB 3.0 (Type-A) for UNITE camera & CHAT Speakerphone
  - 4x USB 2.0 ports
  - 1x HDMI out
  - 1x DVI out
- Button: NIL
- LED: Blue
- Chipset: DL3900, VL82B2, FE 1.1S
- Flash: 8MB
- SDRAM: DDR3 1GB

**POWER & THERMAL**

- Power Supply: 12V 2A
- Power Plug: UK/EU/US/China/Australia (option)
- Power Consumption: 1W
- Rated Voltage/Frequency/Current: 100-240 Va.c. 50/60Hz, 0.1A max, CLASS II

**ENVIRONMENTAL**

- Operating Temperature: 32° F/0° C to 104° F/40° C ambient temperature
- Storage Temperature: 14° F/-10° C to 158° F/70° C ambient temperature
- Relative Humidity: 10%~90%, non-condensing
- Cycle work (hours): 24 hours

**DIMENSION & WEIGHT**

- L x W X H: 8.82" x 3.43" x 1.26" (224mm x 87 mm x 32mm)
- Weight: 0.55 lb (250 g)
- Housing: ABS
- Color: Black

**PART NUMBER**

- 910-3001-100 COLLABORATE<sup>®</sup> Versa Hub

**SALES AND INQUIRIES****Headquarters**

5225 Wiley Post Way  
Suite 500  
Salt Lake City, UT 84116

**US & Canada**

Tel: +1.801.975.7200  
Fax: +1.801.303.5711

**International**

Tel: +1.801.975.7200  
global@clearone.com

**Sales**

Tel: +1.801.975.7200  
sales@clearone.com

**TechSupport**

Tel: +1.801.974.3760  
tech.support@clearone.com