

TAO 1pro




Key Features

- 5.5 inch HD touch screen for operation
- Network HD streaming
- Seamless switcher
- Asynchronous rotation of main screen and HDMI output
- 2*UVC inputs, 2*HDMI 1.3 input and 1* HDMI 2.0 output
- HDCP supported
- Bluetooth 5.0
- NDI 5.0 encoder
- NDI decoder
- Support image function: oscillograph, vectorgraph histogram, etc
- Sound column
- Recording via USB 2.0 port, mobile hard disk stores up to 2T
- Multistream up to 4 Live Streaming platform Simultaneously
- Compatible with SONY NF970 and Panasonic AG-VBR59MC standard battery socket (no battery install for standard version)

Application



Dimension

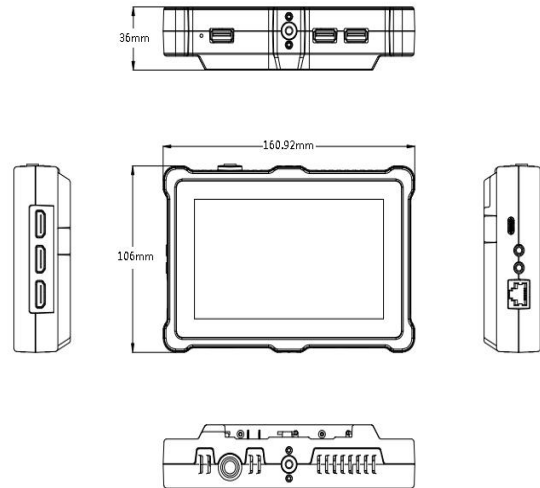

Order Codes

| Product Code | Item |
|---------------|------------------------------------|
| 410-5513-01-0 | TAO 1pro |
| 410-5513-01-1 | TAO 1pro-S |
| 490-5513-01-0 | TAO 1pro lithium battery(optional) |

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

| | | | | |
|-----------------------|----------------------|--|---|--|
| Connectors | Input | HDMI 1.3 | 2×HDMI-A | |
| | | USB 3.0 | 2×USB TypeA | |
| | Output | HDMI 2.0 | 1×HDMI-A | |
| | Record | USB 2.0 | 1×USB TypeA | |
| | Audio | In | 1×3.5mm Audio Jack | |
| | | Out | 1×3.5mm Audio Jack | |
| | Communication/Stream | LAN | 1×RJ45 | |
| Power | | 1×USB-C | | |
| Performance | Input Resolutions | HDMI | | |
| | | SMPTE | 720p@50/60 1080p@23/24/60 | |
| | | VESA | 1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1600×1200@60 1680×1050@60 1920×1080@60 | |
| | Output Resolutions | HDMI | | |
| SMPTE | | 720p@50/60 1080p@24/25/50/60 2160p@60 | | |
| VESA | | 1024×768@60 1280×720@50/60 1280×800@60 1280×1024@60 1360×768@60 1920×1080@50/60 3840×2160@60 | | |
| Supported Standard | HDMI | 1.3(Input) 2.0(Output) | | |
| | USB | 3.0 | | |
| Screen Feature | Screen Dimension | 5.5" TFT | | |
| | Resolution | 1080×1920 pixels | | |
| | Dot Pitch | 0.063(H)×0.021(W)(mm) | | |
| | Aspect Ratio | 16:9 | | |
| | Brightness | 450cd/m ² | | |
| | Contrast | 1000:1 | | |
| | Backlight | LED | | |
| | View Angle | 80°/80°(L/R)80°/80°(U/D) | | |
| Power | Input Voltage | 9V/2A | | |
| | Max Power | 18W | | |
| Environment | Temperature | 0°C~55°C | | |
| | Humidity | 5%~85% | | |
| Physical | Weight | Net | 0.35kg(without battery);882g(with battery) | |
| | | Package | 0.77kg(1pcs) 19.6kg(20pcs) | |
| | Dimension | Net | 161mm×106mm×36mm | |
| | | Package | 255mm×145mm×85mm(1pcs) 565mm×490mm×345mm(20pcs) | |

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgblink.com

