

## SIRIUS HRI 140 W RO

SIRIUS HRI | High-pressure discharge lamps with reflector

### Areas of application

- Concert lighting
- Club and disco
- Stage and theatre
- Studio, TV and film
- Architecture & Architainment

### Product family benefits

- Lightweight and compact reflector lamps
- Perfectly suited for small and lightweight moving heads
- Optimized burner design allows any burning position
- High luminance through very short arc and high pressure
- Bright light for brilliant light effects
- Long lifetime
- Easy lamp replacement
- Stable light output over the entire lifetime



## Product datasheet

### Technical data

#### Electrical data

Nominal wattage	14000 W
Nominal current	19 A
Ignition voltage	2.5 kVp
Nominal voltage	700 V


#### Photometrical data

Nominal luminous flux	5400 lm
Color temperature	9200 K
Color rendering index Ra	60
Maximum color temperature	9200 K

#### Light technical data

Focal length	37.7 mm
Aperture window, maximum	5x3.8 mm

#### Dimensions & weight

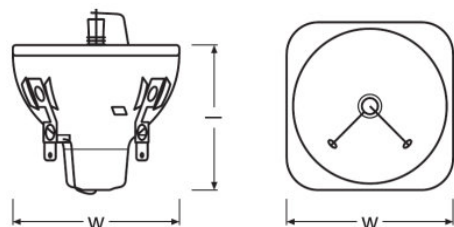

Diameter	460 mm
Length	max. 44 mm
Arc length	1.0 mm

#### Lifespan

Lifespan	6000 h
----------	--------

#### Additional product data

Category	CUSTOMIZED
----------	------------

## Product datasheet

### Capabilities

Burning position	Any
Cooling	Forced
Working distance	37.7 mm

### Certificates & standards

EEL – Energy Label	A
--------------------	---

### Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	06-03-2024
Primary Article Identifier	4052899224056   4052899258969
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	In work

## Product datasheet

---

### Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, SIRIUS HRI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899258969	SIRIUS HRI 140 W RO	Folding carton box 1	87 mm x 87 mm x 103 mm	0.78 dm <sup>3</sup>	108.00 g
4052899258976	SIRIUS HRI 140 W RO	Shipping carton box 2	186 mm x 96 mm x 115 mm	2.05 dm <sup>3</sup>	262.00 g
4052899258983	SIRIUS HRI 140 W RO	Shipping carton box 20	507 mm x 203 mm x 264 mm	27.17 dm <sup>3</sup>	3101.00 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

---