

ez Converter

With Affordable Up/Down Scaler



ez-sh 3G/HD/SD-SDI to HDMI Converter




Input Electrical Specifications

Parameter	Units	Min.	Typ.	Max.
-----------	-------	------	------	------

Video Formats

- 720x480i@59.94/60	-	-	-	-
- 720x576i@50	-	-	-	-
- 1280x720p@50/59.94/60	-	-	-	-
- 1920x1080i@50/59.94/60	-	-	-	-
- 1920x1080p@23.94/24/25/29.97/30	-	-	-	-
- 1920x1080p@50/59.94/60	-	-	-	-

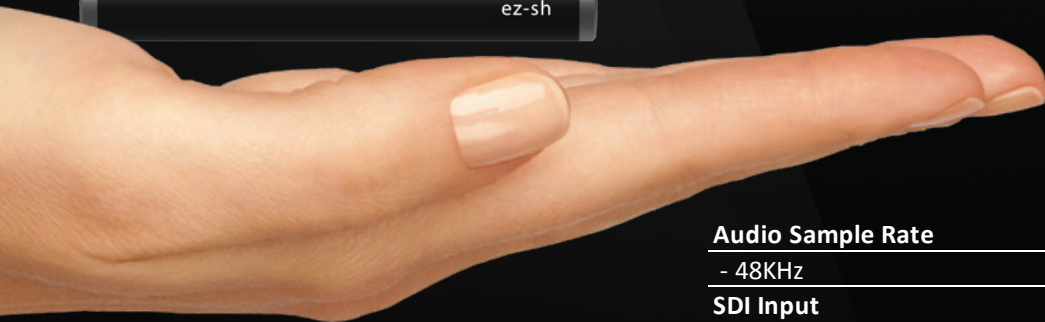

Audio Sample Rate

- 48KHz				
---------	--	--	--	--

SDI Input

Connector (1 Port)	-	75ohm, 1 x BNC type		
--------------------	---	---------------------	--	--

Output Electrical Specifications

Parameter	Units	Min.	Typ.	Max.
-----------	-------	------	------	------

Video Formats

- 720x480i@59.94/60	-	-	-	-
- 720x576i@50	-	-	-	-
- 1280x720p@50/59.94/60	-	-	-	-
- 1920x1080i@50/59.94/60	-	-	-	-
- 1920x1080p@23.94/24/25/29.97/30	-	-	-	-
- 1920x1080p@50/59.94/60	-	-	-	-

Audio Sample Rate

- 48KHz				
---------	--	--	--	--

HDMI Output

Connector (1 Port)	-	Type A		
--------------------	---	--------	--	--

General Specifications

Parameter	Units	Min.	Typ.	Max.
Operating Temperature	°C	-20		75
DC Input Power	V	5		18
Lowest Power Consumption	W			1.8
Dimensions	mm	86.4x66.8x28.4 (include connector)		
Weight	g		149	





ez Converter

With Affordable Up/Down Scaler

ez-hs HDMI to 3G/HD/SD-SDI Converter



Input Electrical Specifications

Parameter	Units	Min.	Typ.	Max.
-----------	-------	------	------	------

Video Formats

- 720x480i@59.94/60				
- 720x576i@50				
- 1280x720p@50/59.94/60	-	-	-	-
- 1920x1080i@50/59.94/60				
- 1920x1080p@23.94/24/25/29.97/30				
- 1920x1080p@50/59.94/60				

Audio Sample Rate

- 48KHz				
---------	--	--	--	--

HDMI Input

Connector (1 Port)	-	Type A		
--------------------	---	--------	--	--

Output Electrical Specifications

Parameter	Units	Min.	Typ.	Max.
-----------	-------	------	------	------

Video Formats

- 720x480i@59.94/60				
- 720x576i@50				
- 1280x720p@50/59.94/60	-	-	-	-
- 1920x1080i@50/59.94/60				
- 1920x1080p@23.94/24/25/29.97/30				
- 1920x1080p@50/59.94/60				

Audio Sample Rate

- 48KHz				
---------	--	--	--	--

SDI Output

Connector (2 Port)	-	75ohm, 2 x BNC type female		
--------------------	---	----------------------------	--	--

General Specifications

Parameter	Units	Min.	Typ.	Max.
Operating Temperature	°C	-20		75
DC Input Power	V	5		18
Lowest Power Consumption	W			2.04
Dimensions	mm	86.4x66.8x28.4		
Weight	g		159	

