

Soundweb™ 9012 Wall Panel


SOUNDWEB™

Overview


The Soundweb 9012 Wall Panel is a simple hardware interface to the Soundweb Programmable DSP system.

It provides a quick and easy way for designers to provide a rotary fader control and source select (or other multiway switch function) in a standard UK-sized light switch panel mounting.

Using Soundweb Designer to 'map' functions onto the 9088*iis* control ports, these hardware controls can then be used to provide local control of, for example, volume, source select, or parameter presets.

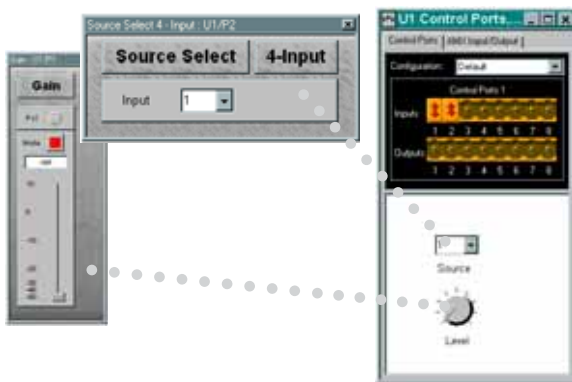

Connection is via the Soundweb standard Phoenix/Combicon removable screw terminal connectors. Three terminals are used for common, switch output and fader output.

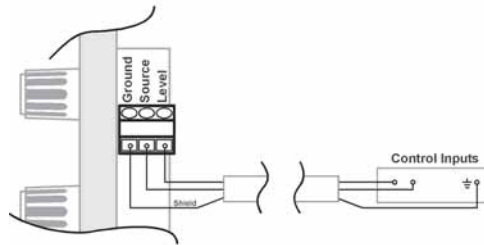

The switch has blank ident areas for marking the switch positions, either directly onto the white area or on self-adhesive labels. A set of 'standard' labels in 4 languages (English, French, German & Spanish) are supplied with the 9012 which should cover most locational requirements.

Additional or replacement switches and potentiometers are available from BSS Audio under the following part numbers:

Rotary Switch: DH10007

Potentiometer: DM10018



9012 Features

- Rotary fader for Volume control etc.
- 5-way rotary switch for source select etc.
- Standard UK light-switch fitting or US fitting in Beige

Connector Pin-outs

GND:

Common Connection (to Control Ports COMMON pin)

1: SOURCE SELECT/PRESET
connection (switch)

2: LEVEL
connection (rotary fader)

BSS Audio UK A Division of Harman International Industries Ltd
Cranborne House, Cranborne Road, Potters Bar,
Hertfordshire, England, EN6 3JN
Tel +44 (0)1707 660667, Fax +44 (0)1707 660755
www.bss.co.uk/soundweb/
email: soundweb@bss.co.uk

Harman Music Group
8760 S. Sandy Parkway
Sandy, Utah 84070
Tel: 801-566-8800 Fax: 801-568-7662
web: www.bssaudious.com

H A Harman International Company