



ART 745-A MK5

ACTIVE TWO-WAY SPEAKER



Description

The ART 745-A MK5 is the flagship speaker in its category. The titanium dome, 4.0" voice coil neodymium compression driver offers a unique vocal clarity and sound projection. The 15" neodymium woofer offers an extremely linear response and a precise, deep low frequency control. The transducers are produced using the most advanced assembly technologies. The amplifier delivers 1400 watts and is controlled by a DSP that takes care of crossover, equalisation, phase control, soft limiting and speaker protections

Features

- › 133 dB Max SPL
- › 1400 WATT 2-way peak power
- › 90° x 60°, Wide dispersion constant directivity horn
- › Innovative DSP Processing
- › 4" Compression Neodymium Driver with Titanium diaphragm
- › 15" Neodymium Woofer
- › FIRPHASE Technology
- › XBOOST Low Frequencies Enhancer

Part Number


13000827	ART 745-A MK5	220-240 V	Black	EAN 8024530021498
13000858	ART 745-A MK5	100-120 V	Black	EAN 8024530021566



ART 745-A MK5

ACTIVE TWO-WAY SPEAKER

Line Art 2D

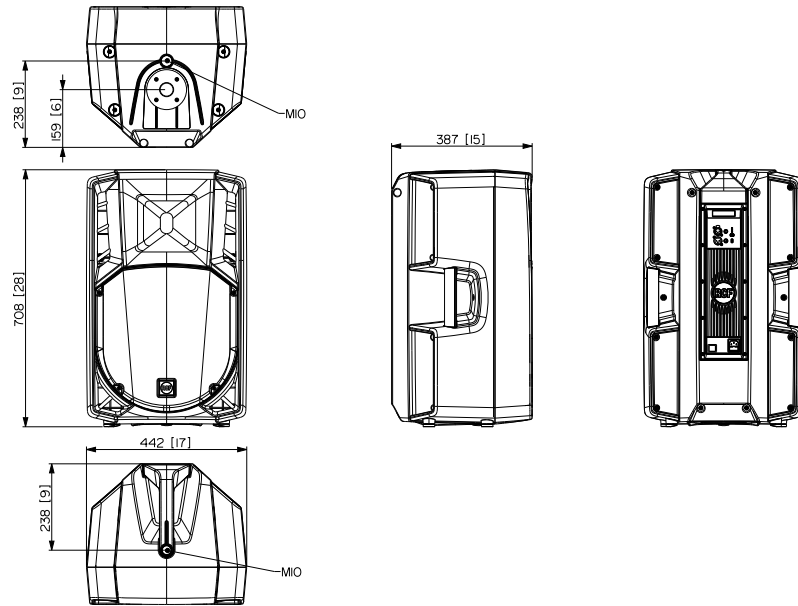

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	45 Hz ÷ 20000 Hz	
	Max SPL @ 1m	133 dB	
	Horizontal coverage angle	90°	
	Vertical coverage angle	60°	
Transducers	Compression Driver	1 x 1.0" neo, 4.0" v.c	
	Woofer	1 x 15" neo, 3.5" v.c	
Input/Output section	Input signal	bal/unbal	
	Input connectors	XLR, Jack	
	Output connectors	XLR	
	Input sensitivity	-2 dBu/+4 dBu	
	Mic. Input Sensitivity	-32 dBu	
Processor section	Crossover Frequencies	650	
	Protections	Thermal, RMS	
	Limiter	Soft Limiter	
Power section	Controls	Volume, Boost, MIC/Line	
	Total Power	1400 W Peak	
	High frequencies	400 W Peak	
	Low frequencies	1000 W Peak	
Standard compliance	Cooling	Convection	
	Connections	VDE	
	Safety agency	CE compliant	
	Physical specifications	Cabinet/Case Material	PP Composite
		Hardware	2 x M10
		Handles	1 on top, 1 each side
		Pole mount/Cap	Yes
Grille	Steel		
Color	Black		



ART 745-A MK5

ACTIVE TWO-WAY SPEAKER

Size	Height	708 mm / 27.87 inches
	Width	437 mm / 17.2 inches
	Depth	389 mm / 15.31 inches
	Weight	18.8 kg / 41.45 lbs

ACCESSORIES

Cables	AC XLR 3M3F	13360102	8024530006402
Protections	CVR ART 725	13360115	8024530010676
Rigging / Mounting	AC PMX	13360232	8024530010058
	AC PRO-FS	13360109	8024530006471
	AC PRO-PM	13360110	8024530006488
	H-BR 2X ART 715	13360105	8024530012939
	PM-KIT M20	13360067	8024530014599